

SALIND 08 4G

DATA SHEET


Fixed connection



Small and discreet



Logbook

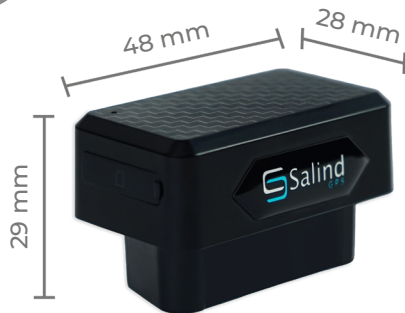

OBD2 interface

No on/off button:
Device starts automatically
when connected to the
power supply!



30 g



4G LTE



9-35 V

Areas of application



Cars



Taxis



Caravans



Lorries



Buses



Transporters

Technical details

Battery time (intern)

Fixed connection OBD2
plug / internal battery
approx. 6 hrs (Standby)

Battery type (intern)

3.7 V / 60 mAh Li-ion

GPS accuracy

up to 5 meters

**Operating
temperature**

from -20 °C to +75 °C

Humidity

from 10 % to 85 %

Summary information

- Usable via the PAJ FINDER Portal (registration required after receiving the device)
- Current position can be viewed on map at anytime
- Worldwide location in over 100 countries
- Live mode, location update on movement every 10 seconds
- Route information of the last 365 days available
- Alarm notifications for different events/situations
- Notifications via the PAJ app and via e-mail



Alarm functions



Vibration



Geofence



Speed



Power cut



Voltage

